





Pro Clamp

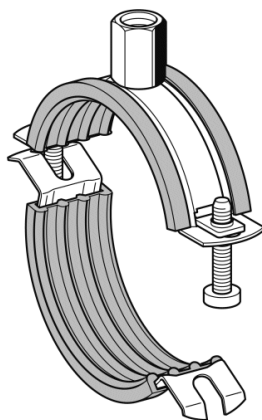

- Kombimutter M 8/M10 (M10/M12)
- Dämpgummiklädd
- Täcker alla dimensioner
- Snabb montering
- Ljuddämpande ≈ 17 dB (A)
- Temp. -50°C $+110^{\circ}\text{C}$
- Enligt DIN 4109



Du sparar in på bladhylsa, skruv, mutter och arbetstid.

| RSK nr | Artikel nr | Dimension | För rör y.d. mm | Förpackning |
|---------|------------|-----------|-----------------|-------------|
| 3800031 | 26650 | 3/8" | 12-20 | 100 |
| 3800032 | 26652 | 1/2"-3/4" | 21-27 | 100 |
| 3800033 | 26654 | 1" | 28-35 | 100 |
| 3800034 | 26656 | 1 1/4" | 38-45 | 50 |
| 3800035 | 26658 | 1 1/2" | 48-56 | 50 |
| 3800036 | 26660 | 2" | 57-63 | 50 |
| 3800037 | 26662 | | 64-71 | 25 |
| 3800038 | 26664 | 2 1/2" | 73-80 | 25 |
| 3800039 | 26666 | 3" | 83-90 | 25 |
| 3800040 | 26668 | 4" | 108-114 | 25 |
| 3800043 | 26670 | | 116-125 M10/M12 | 25 |
| 3800044 | 26672 | | 127-135 M10/M12 | 25 |
| 3800041 | 26646 | 5" | 140-146 M10/M12 | 25 |
| 3800042 | 26648 | 6" | 159-170 M10/M12 | 25 |
| | 26640 | | 193-200 M10/M12 | 1 |
| | 26641 | 8" | 216-220 M10/M12 | 1 |
| | 26642 | | 225 M10/M12 | 1 |
| | 26643 | | 274 M10/M12 | 1 |
| | 26644 | | 315 M10/M12 | 1 |

| Storlek mm | Max belastning |
|------------|----------------|
| 12 - 80 | 1,0 kN |
| 83 - 90 | 1,4 kN |
| 108-114 | 1,5 kN |
| 140-170 | 2,5 kN |