



Pro Clamp

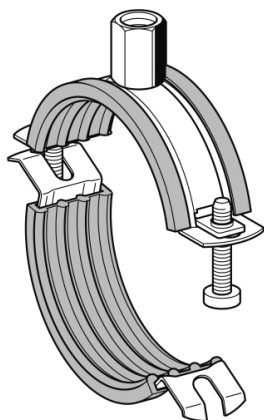

- Kombimutter M 8/M10 (M10/M12)
- Dämpgummiklädd
- Täcker alla dimensioner
- Snabb montering
- Ljuddämpande ≈ 17 dB (A)
- Temp. -50°C $+110^{\circ}\text{C}$
- Enligt DIN 4109



Du sparar in på bladhylsa, skruv, mutter och arbetstid.

RSK nr	Artikel nr	Dimension	För rör y.d. mm	Förpackning
3800031	26650	3/8"	12-20	100
3800032	26652	1/2"-3/4"	21-27	100
3800033	26654	1"	28-35	100
3800034	26656	1 1/4"	38-45	50
3800035	26658	1 1/2"	48-56	50
3800036	26660	2"	57-63	50
3800037	26662		64-71	25
3800038	26664	2 1/2"	74-84	25
3800039	26666	3"	83-90	25
3800040	26668	4"	108-114	25
3800043	26670		116-125 M10/M12	25
3800044	26672		127-135 M10/M12	25
3800041	26646	5"	140-146 M10/M12	25
3800042	26648	6"	159-170 M10/M12	25
	26640		193-200 M10/M12	1
	26641	8"	216-220 M10/M12	1
	26642		225 M10/M12	1
	26643		274 M10/M12	1
	26644		315 M10/M12	1

Storlek mm	Max belastning
12 - 80	1,0 kN
83 - 90	1,4 kN
108-114	1,5 kN
140-170	2,5 kN